NORDOCK®
405 LAKE ROAD
BOWMANVILLE, ONTARIO L1C 4P8
PH: 905-697-4276 FAX: 905-697-6422
WEB: www.nordockinc.com
Dedicated People - Superior Products

MAST GUIDE LIFT TRANSMITTAL #39-0014

DATE:	S.O. #	1/21/03	MG
SALES PERSON:	QUOTED BY:		
PHONE #:	FAX #:		

BILL TO:	SHIP TO:	END USER:

P.O. #	SHIP DATE / LEAD TIME:	SHIP VIA:	WEIGHT:	PPD	COLLECT	3RD PARTY

MODEL SPECIFICATION: _____ **QUANTITY:** _____

CAPACITY: ☐ 5,000 LBS ☐ 8,000 LBS ☐ 10,000 LBS ☐ 20,000 LBS ☐ OTHER _____

NOTE: 5K & 8K - SINGLE MAST, 10K & 20K - DUAL MAST

DECK: ☐ CHECKER PLATE (STD) ☐ SMOOTH PLATE MAST LOCATION ☐ B ☐ D

DECK SIZE: (H) WIDTH _____ X (G) LENGTH _____

LOWERED HEIGHT: ☐ 2.5" ☐ 4.5" ☐ 5.5" OTHER _____

TRAVEL: _____ RAISED HEIGHT: _____

LIP: - WIDTH (E)_____ LENGTH (F)_____ LIP ASSIST ☐

LOCATION: ☐ A ☐ B ☐ C ☐ STEEL ☐ ALUMINIUM ☐ SPLIT

RAMP: - WIDTH (E)_____ LENGTH (I)_____ HINGED ☐

LOCATION: ☐ A ☐ B ☐ C ☐ D STATIONARY ☐

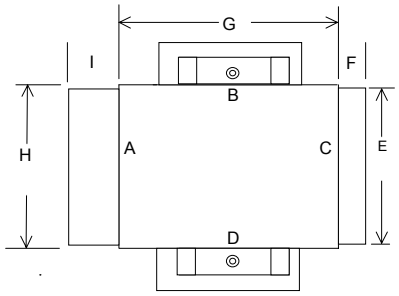

GUARD RAILS: LOCATION: ☐ A ☐ B ☐ C ☐ D

☐ OPEN ☐ CLOSED ☐ BOLT ON ☐ STAKE POCKETS

NOTE: MAST SIDES HAVE 60" HIGH CLOSED STEEL PANELS

SHORTENED LENGTH: _____ POST LOCATION: _____

CONTROLS: ☐ NEMA 4 PUSH BUTTON ON COIL CORD ☐ PUSH BUTTON ON 8' OF CABLE

☐ FOOT PEDAL CONTROL ON 8' OF CABLE ☐ PUSH BUTTON ON DECK POST/PANEL

POWER REQUIREMENT: ☐ SINGLE PHASE ☐ 115V ☐ 208V ☐ 230V

☐ THREE PHASE ☐ 208V ☐ 230V ☐ 460V

☐ 600V H.P._____ OTHER _____

OPTIONS:

PERIMETER SAFETY STOP ☐ A ☐ B ☐ C

UPPER TRAVEL LIMIT SWITCH ☐

PORTABILITY KIT 5,000 LB 6x6 ONLY ☐

POWER UNIT COVER (REQUIRED FOR OUTSIDE INSTALLATIONS) ☐

SPECIAL REQUIREMENTS:

LIST EACH	
OPTIONS / SPECIAL REQUIREMENTS	**LIST EACH**
	OPTIONS / SPECIAL REQUIREMENTS
	TOTAL LIST
	DISCOUNT
	TOTAL NET EACH
	X QUANTITY
	TOTAL
	FREIGHT
	TAX
	TOTAL